

# Gialix **B** 6 kW

**NEW**

**ELECTRIC BOILER WITH DHW\* STORAGE  
FOR HEATING AND DOMESTIC HOT WATER**

*Compact, fully integrated*  
**ECONOMICAL AND EFFICIENT**

Up to  
**4 TIMES**  
**more hot water**  
than an electric tank  
of the same size

*All the advantages of the Gialix MT  
with the added comfort of having a  
rapidly regenerated supply of hot water  
on demand*



**FAST  
ECONOMICAL  
COMPACT**

## INGENIOUS AND EFFICIENT

- The Gialix 6kW modulating boiler is perfect for heating and domestic hot water
- Power output adjustable in 2kW stages
- 80 litre DHW tank
- 155 L of hot water output at 40°C in 10 min
- Only 25 min needed for the tank to regain its temperature<sup>(1)</sup>
- 5 times less scale than an ordinary electric water heater: the solution for hard water

(1) from 40 to 65°C

## THE ADVANTAGES

- Extremely compact, providing heating for your home and an abundant supply of hot water
- Replaces your old gas boiler and eliminates the need for a service subscription: you will only have one meter in your house
- No mandatory annual maintenance
- No chimneys or air ducts
- Far quieter than a combustion boiler
- Ultra-precise controls, just like those in the Gialix MT range

**CAST IRON**  
making it  
the most efficient  
of electric boilers  
**GUARANTEED 20 YEARS**




\*DHW = Domestic Hot Water



**FRENCH  
MANUFACTURER**



# ULTRA-PRECISE CONTROLS FOR MORE SAVINGS

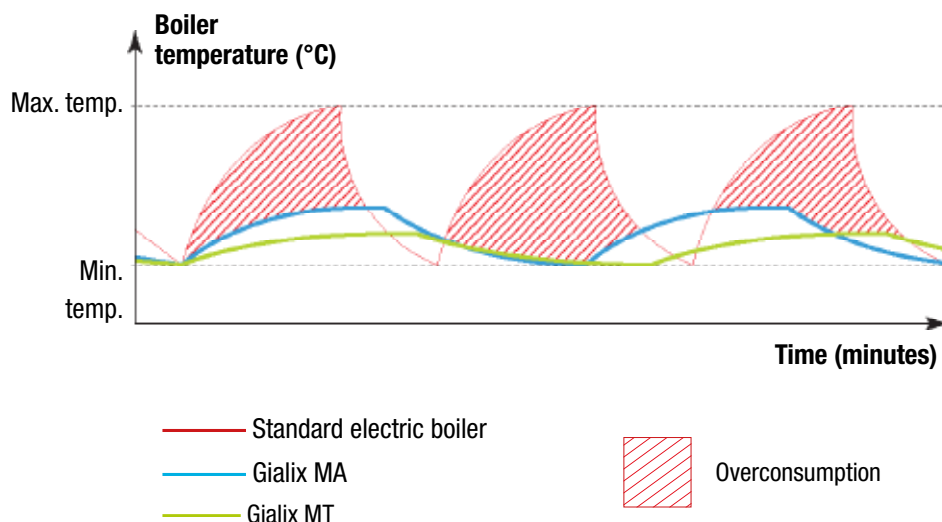

*With no harmful discharge (no NOx gases), the Gialix DS is the best solution for renovating homes*

## TECHNICAL DATA

### STANDARD FEATURES

- Modulating electronic regulation for a heating circuit which operates depending on outdoor temperature and DHW production
- Power level can be adjusted to suit the property
- Incoloy 800 electric heating elements to give greater durability
- 8L expansion vessel
- Low energy circulator pump
- Safety valve
- Pressure gauge
- 65°C safety aquastat (underfloor heating) and 110°C safety aquastat (radiators)

Description	Energy category	Power adjustable through settings (kW)	Voltage	Min. power cable width (mm <sup>2</sup> )	Circuit breaker (A)	Outdoor temperature sensor	Volume	Reference
<b>ELECTRIC WALL-HUNG OR FLOOR-STANDING BOILERS WITH INTEGRATED DHW (cast iron heating body)</b>								
Gialix DS80	D	2-4-6	230V-single	6	32	optional	80L integrated	132641

### Gialix DS 80 accessories

Adjustable tripod								730016
Holding tabs (x2)								713130
Wall brackets (x2)								730018
TA - Room temperature sensor								710043
TH - Room temperature sensor with timer								710044
TH RNC - Wireless clock thermostat (Nonchronoproportional wireless clock thermostat)								710172

YOUR INSTALLER:

#### HEAD OFFICE AND EXPORT

107 boulevard Ney - 75876 Paris cedex 18  
Tel. +33 1 53 06 27 11 - Fax. +33 1 44 85 07 15  
E-mail: export@auer-gianola.fr

#### TRAINING & TECHNICAL ADVICE

Tel. +33 3 22 61 33 33 - Fax. +33 3 22 30 01 19  
E-mail: enr@auer.fr

